



1 ELECTRICAL SITE PLAN

SHEET NOTES

NOTES:

1. PROVIDE CONCRETE PULLBOX COMPLETE WITH EXTENSION AND COVER, MARKED LID "ELECTRICAL". PRODUCT AS MANUFACTURED BY CHRISTY OR APPROVED EQUAL.
2. COORDINATE EXACT ROUTING OF DUCTBANK IN THE FIELD.
3. THE CONTRACTOR SHALL BE RESPONSIBLE TO INVESTIGATE AND VERIFY THE ACTUAL LOCATION AND DEPTH OF ALL EXISTING UNDERGROUND FACILITIES AT LEAST 48 HOURS IN ADVANCE OF THE PERFORMANCE OF ANY WORK. CALL (USA) UNDERGROUND SERVICE ALERT. TEL#: 800-227-2600 BEFORE TRENCHING
4. CONTRACTOR TO BE COGNIZANT OF (H.V.) UG UTILITY LINE PRIOR TO EXCAVATION. COORDINATE WITH UTILITY CO AS NECESSARY PRIOR TO TRENCHING.
5. REPAIR TRENCH LINE TO MATCH (E) SURFACE, TYP. UON.
6. CONFIRM CONDUIT SIZE AND QUANTITY WITH DRAWING E3-HO.

KEYNOTES


- 1 PROVIDE CODE SIZE PULL BOX, SUITABLE FOR TRAFFIC LOADING, COMPLETE WITH EXTENSION AND STEEL COVER, COORDINATE EXACT LOCATION IN THE FIELD.
- 2 FOR ELECTRICAL SIGNAGE AND LOCATION SEE DWG. E11.
- 3 SEE ARCH. DWGS. FOR EXACT LOCATION.

CONDUIT SCHEDULE

TAG	CONDUIT	FROM	TO
F1	(1) 2" C	CB "A1"	EQUIP PAD
F2	(1) 1" C	CB "A2"	EQUIP PAD
F3	(1) 3/4" C	CB "A3"	EQUIP PAD
F4	(1) 1-1/4" C	CB "A4"	EQUIP PAD
F5	(1) 3" C	EQUIP PAD	TIE-IN LOCATION
F6	(1) 1" C	MET STATION	DAS


SUNPOWER
1414 HARBOUR WAY SOUTH - RICHMOND, CA 94804 USA
(510) 540-0560

ITEM:	REVISIONS/ISSUE:	DATE:
DSA	SUBMITTAL	XX/XX/XX
PG&E	SUBMITTAL	10/12/11

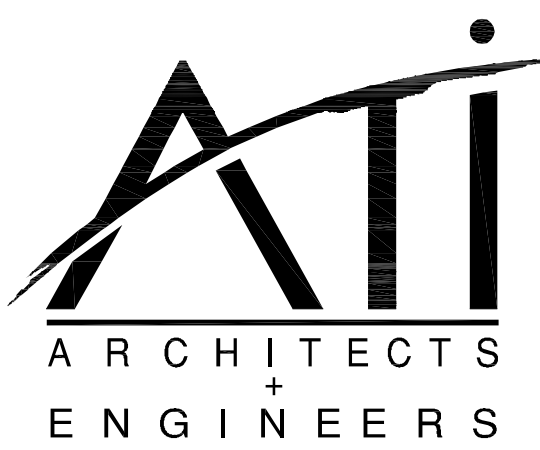

www.atiae.com
3860 Blackhawk Road Danville, CA 94505 T 925.648.8900
2510 Douglas Boulevard Roseville, CA 95661 T 916.772.1800
3050 Pullman Street Costa Mesa, CA 92626 T 714.338.1600
1901 Orange Tree Lane Redlands, CA 92374 T 909.801.8160

PROFESSIONAL STAMP:

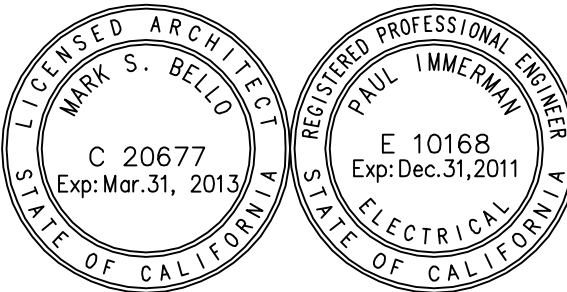

APPROVALS:

PROJECT TITLE:

**SUNPOWER
ELEVATED
SOLAR CANOPY
HOLBROOK
ELEMENTARY
MT. DIABLO UNIFIED
SCHOOL DISTRICT**

SHEET TITLE:

**ELECTRICAL
SITE
PLAN**

DATE: 08/01/11 SCALE: AS NOTED

DRAWN BY: JAG/AR CHECKED BY: PMI

JOB NO: SA8504.014

CAD FILE: +E1-HO_Site.dwg

SHEET NO:

E1-HO